


# X50N

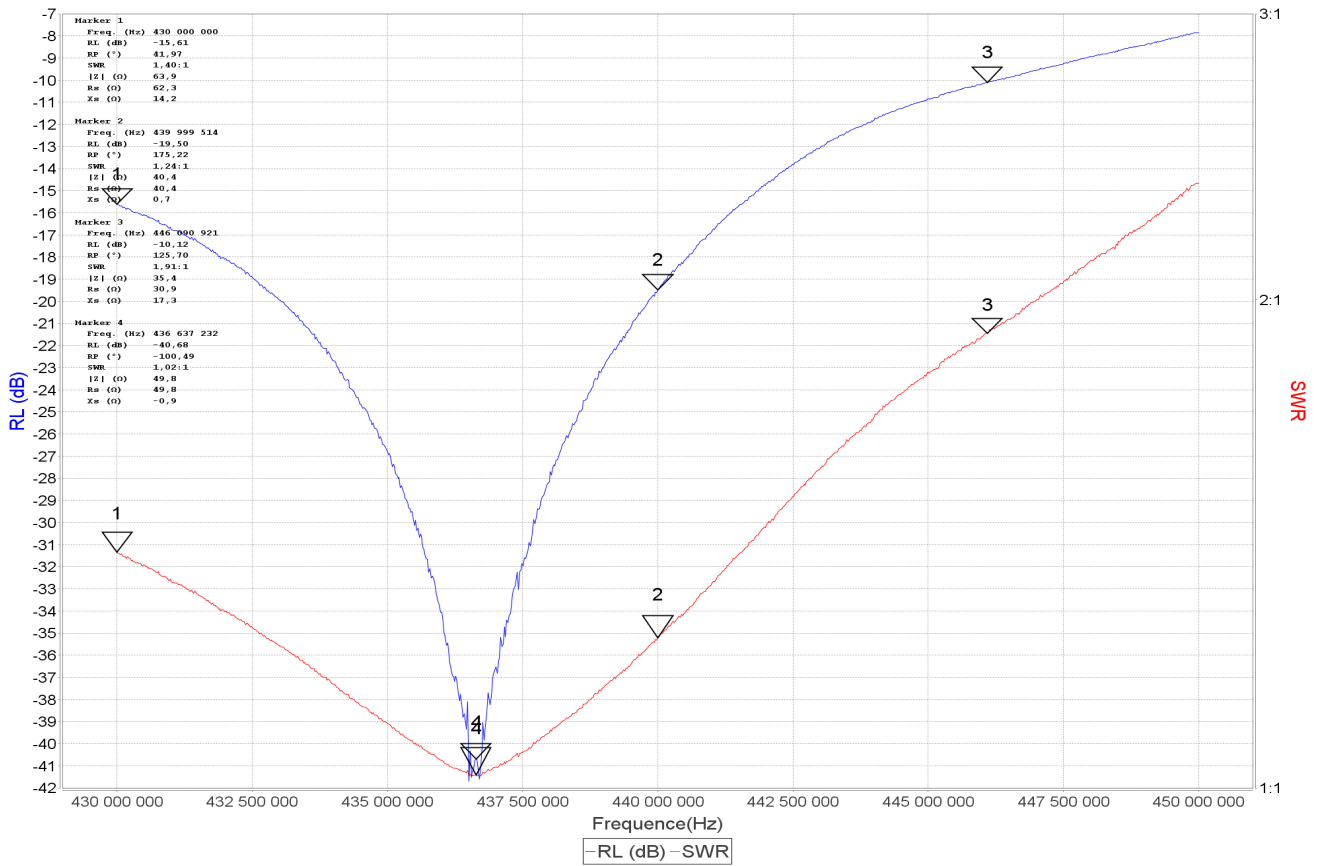

Marqueur	Freq. (Hz)	RL (dB)	RP (°)	Z  (Ω)	Rs (Ω)	Xs (Ω)	Theta	SWR
1	430 000 000	-15,61	41,97	63,9	62,3	14,2	12,8	1,40:1
2	439 999 514	-19,50	175,22	40,4	40,4	0,7	1,0	1,24:1
1-2	9 999 514	3,88	133,26	23,4	21,8	13,5	0,0	---
3	446 090 921	-10,12	125,70	35,4	30,9	17,3	29,3	1,91:1
4	436 637 232	-40,68	-100,49	49,8	49,8	-0,9	-1,0	1,02:1

**Comment:**

Date: 07/06/17 18:04  
 Mode: Reflexion  
 Analyser: miniVNA Tiny / mini radio solutions - miniVNA Tiny  
 Scan  
 Start: 430000000 / 430 000 000  
 Stop: 449999770 / 449 999 770  
 Samples: 917  
 Overscan: 1  
 Calibration  
 Samples: 10000  
 Overscan: 0  
 File: ---  
 User: L30

Headline: X50N  
Port extension len: <not set>m  
Port extension vf: <not set>