


X50N

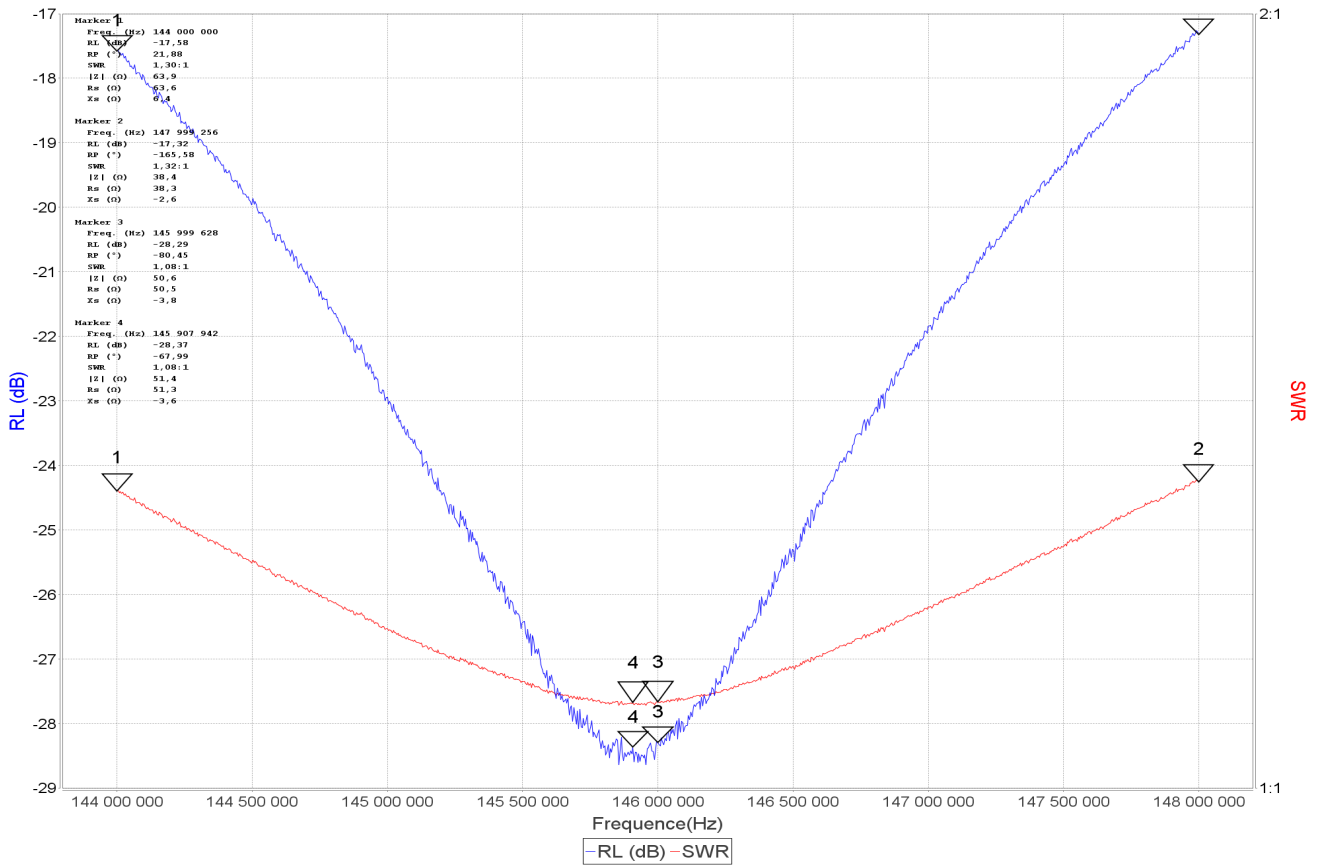

Marqueur	Freq. (Hz)	RL (dB)	RP (°)	Z (Ω)	Rs (Ω)	Xs (Ω)	Theta	SWR
1	144 000 000	-17,58	21,88	63,9	63,6	6,4	5,7	1,30:1
2	147 999 256	-17,32	-165,58	38,4	38,3	-2,6	-4,0	1,32:1
1-2	3 999 256	0,26	187,46	25,6	25,3	9,0	0,0	---
3	145 999 628	-28,29	-80,45	50,6	50,5	-3,8	-4,3	1,08:1
4	145 907 942	-28,37	-67,99	51,4	51,3	-3,6	-4,1	1,08:1

Comment:

Date: 07/06/17 18:06
 Mode: Reflexion
 Analyser: miniVNA Tiny / mini radio solutions - miniVNA Tiny
 Scan
 Start: 144000000 / 144 000 000
 Stop: 147999954 / 147 999 954
 Samples: 917
 Overscan: 1
 Calibration
 Samples: 10000
 Overscan: 0
 File: ---
 User: L30

Headline: X50N
Port extension len: <not set>m
Port extension vf: <not set>